


B-TDM-M

Decorative Grade Non Heat Sealable Metallized BOPP Film

B-TDM-M is a metallized BOPP film having metal one side with treatment and other side non heat sealable.

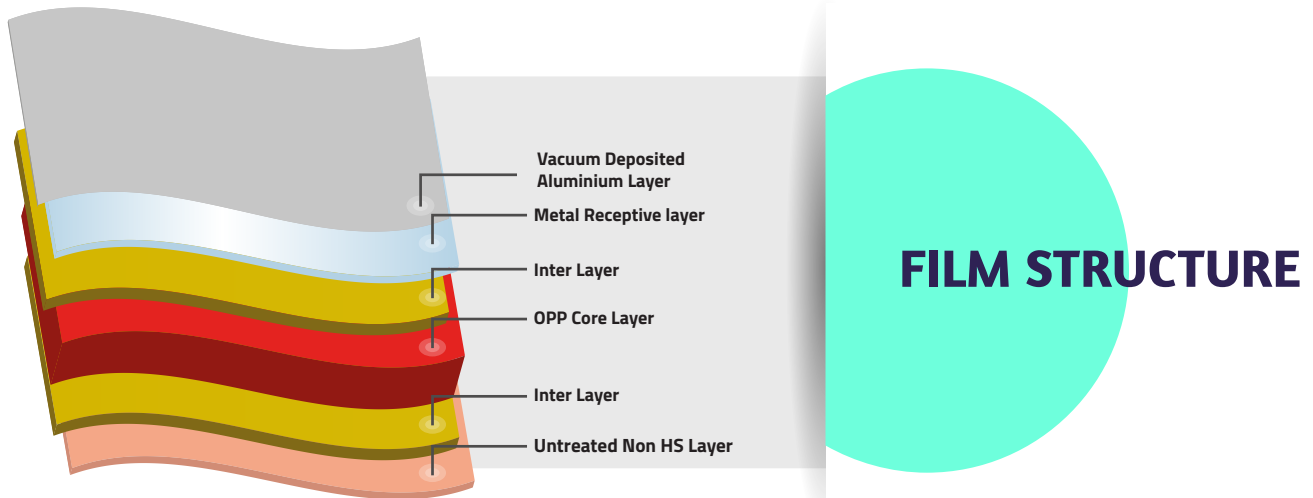

THE BIG DIFFERENTIATORS



Good Metal Adhesion

Good lamination Bond with paper.



Excellent Metal Brilliance

Imparting enrichment to the brands.



Good Flatness

Uniform adhesive coating.



High Yield

Low gsm & high linear mileage.



Good Machinability

Highly productive Performance

KEY FEATURES:

- Excellent metal brilliance
- Good adhesive bond
- Good gloss
- High yield

APPLICATIONS:

- Decoration (Gift Pack, Cosmetics)
- Disposable paper plates

PROPERTIES		TEST METHOD (ASTM)	UNIT	TYPICAL VALUES					
THICKNESS		Internal	Micron	8	9	10	15	18	20
			(Gauge)	32	36	40	60	72	80
FILM DENSITY		D-1505	gm/cc	0.91					
GRAMMAGE		Internal	gm/m ²	7.3	8.2	9.1	13.7	16.4	18.2
YIELD		Internal	m ² /kg	137	121.9	109.9	73.1	61.1	54.9
			in ² /lb	96311	85695	77259	51389	42953	38594
TREATMENT LEVEL		D-2578	dyne/cm	36					
OPTICAL DENSITY (TOLERANCE : ±5%)		-	-	1.8					
TENSILE STRENGTH AT BREAK	MD*	D-882	kg/cm ²	1250					
	TD*			2500					
	MD*		(KPsi)	17.8					
	TD*			35.5					
ELONGATION AT BREAK	MD*	D-882	%	200					
	TD*			60					
LINEAR SHRINKAGE (max) (5 Minutes at 130°C)	MD*	D-1204	%	6.0					
	TD*			3.0					
WATER VAPOUR TRANSMISSION RATE (38°C & 90% RH)		F-1249	gm/m ² /day	1.1	1.1	1.1	1.1	1.0	1.0
			(gm/100 in ² /day)	0.07	0.07	0.07	0.07	0.06	0.06
OXYGEN TRANSMISSION RATE (23°C & 0% RH)		D-3985	cc/m ² /day	150	150	145	130	125	120
			(cc/100 in ² /day)	9.6	9.6	9.3	8.4	8.0	7.7

Ref no QAD UFLI S/14 – MB 6/2

*MD = MACHINE DIRECTION *TD = TRANSVERSE DIRECTION

STORAGE & HANDLING

FLEXMETPROTECT™ does not require special storage conditions. It is recommended to storage below 30°C in order to avoid any deterioration of the film surface properties. It is advisable to use the material on FIFO basis. The film should be kept at operating environment for 24 hours before processing. FLEXMETPROTECT™ is best suitable for use within 3 months from date of dispatch.

FOOD CONTACT

FLEXMETPROTECT™ complies with EC and FDA regulations. Specific document and MSDS are available on request.

DISCLAIMER

It is the responsibility of our customers to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Flex provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Flex reserves the right to change the technical data sheet at any time without prior notice.

**TDS issued on 01-04-2020. All previous version of this grade are invalid.

FlexFilms

Manufacturing Facilities at
India | UAE | Poland | Egypt | Mexico |
USA | Hungary | Russia | Nigeria
enquiry@flexfilm.com
www.flexfilm.com