

F-PUX


EXCELLENT BARRIER ALOX FILM

F-PUX is a transparent AIOx BOPET film. The film has a Protective Printable layer atop a High Barrier vacuum deposit on one side with the other side treated with a Standard Primer Slip Coat.

KEY FEATURES:

- Excellent moisture & oxygen barrier properties
- Environment friendly
- High clarity and product visibility

FILM STRUCTURE

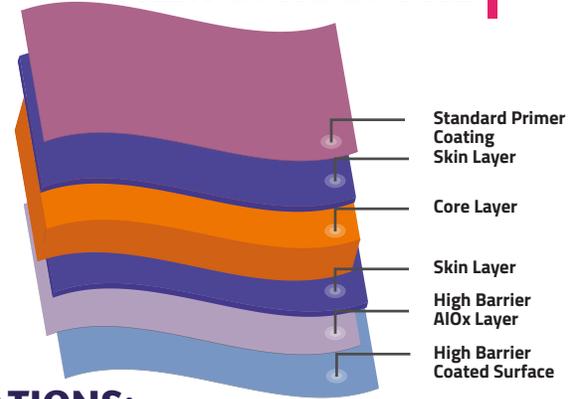

APPLICATIONS:

- Dry packaging application
- Eye catching packaging

PROPERTIES		TEST METHOD	UNIT	TYPICAL VALUES		
THICKNESS		Internal	Micron	9.5	12.5	23.5
			(Gauge)	38	50	94
YIELD		Internal	m ² / kg	75.18	57.14	30.40
			in ² /lb	52967	40257	21410
SURFACE TENSION (min) (Standard Primer Coated surface) (High Barrier Coated Surface)		ASTM D-2578	dyne/cm	40		
				60		
COF (max) (One side to the other side)		ASTM D-1894	-	0.50	0.50	0.50
HAZE (max)		ASTM D-1003	%	3.0	3.0	3.5
TENSILE STRENGTH AT BREAK (min)	MD	ASTM D-882	kg/cm ²	1900	1900	1900
	TD			2000	2000	2000
	MD		(Psi)	27000	27000	27000
	TD			28500	28500	28500
ELONGATION AT BREAK (min)	MD	ASTM D-882	%	100	105	115
	TD			80	85	90
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	MD	ASTM D-1204	%	3.0		
	TD			1.0		
MVTR (38°C & 90% RH) (typical)		ASTM F-1249	gm/m ² /day	0.2	0.2	0.2
			(gm/100 in ² /day)	0.013	0.013	0.013
OTR (23°C & 0% RH) (typical)		ASTM D-3985	cc/m ² /day	0.1	0.1	0.1
			(cc/100 in ² /day)	0.006	0.006	0.006

STORAGE & HANDLING

FLEX ALOXPROTECT™ needs to be stored in a warehouse below 35 °C (95 °F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions this material is suitable for use within 180 days from the date of shipment.

FOOD CONTACT

FLEX ALOXPROTECT™ complies with EU and FDA regulations on plastic materials used for food grade applications. Specific documents and SDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Flex provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Flex reserves the right to change the technical data sheet at any time without prior notice.

Ref. No: QAD UFLIS/22-FAL110/1

**TDS issued on 11-04-2022. All previous version of this grade are invalid.

FlexFilms

Manufacturing Facilities at
 India | UAE | Poland | Egypt | Mexico |
 USA | Hungary | Russia | Nigeria
 enquiry@flexfilm.com
 www.flexfilm.com