


# F-LAU-M

## METALLIZED PRIMER COATED LIDDING FILM

Base polyester is one side Standard Primer Coated with the other side Corona Treated or Untreated. F-LAU-M is a metallized BOPET film exhibiting excellent lidding properties. The film is available in optical densities ranging from 2.2 to 2.8. The metallization is available on either the Untreated (MU) or Corona Treated surface (MT) as specified by the customer. The bond strength between the metal and the film is a minimum of 100gm/25mm when metallized on the Untreated surface & a minimum of 130gm/25mm when metallized on the Corona Treated surface.

## FILM STRUCTURE

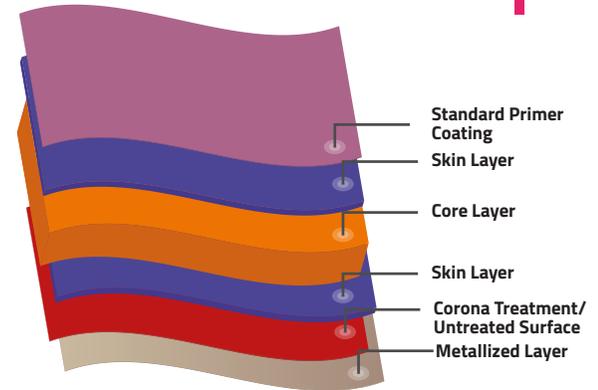

### KEY FEATURES:

- Corona Treatment improves bonding
- Primer Coated surface provides excellent adhesion with inks & various adhesives
- Excellent machinability & handling properties

### APPLICATION:

- Specially designed for lidding
- Conversion
- Printing & Lamination

PROPERTIES	TEST METHOD	UNIT	TYPICAL VALUES			
OPTICAL DENSITY*** (TOLERANCE: +/- 5%) (***Customer to specify the OD value as per their specification.)			Standard Density (SD) 2.2 - Barrier Packaging Application High Density (HD) 2.5 - High Barrier Application Very High Density (VHD) 2.8 - Special Application			
THICKNESS	Internal	Micron	10	12	23	
		(Gauge)	40	48	92	
YIELD	Internal	m <sup>2</sup> / kg	71.42	59.52	31.05	
		in <sup>2</sup> / lb	50318	41934	21876	
SURFACE TENSION (min) # ★ (Standard Primer Coated surface) (Corona Treated surface)	ASTM D-2578	dyne/cm	40			
			52			
COF (max) (One side to the other)	ASTM D-1894	-	0.70			
TENSILE STRENGTH AT BREAK (min)	MD TD MD TD	ASTM D-882	kg/cm <sup>2</sup>	1900	1900	1900
				2000	2000	2000
			(Psi)	27000	27000	27000
				28500	28500	28500
ELONGATION AT BREAK (min)	MD TD	ASTM D-882	%	100	105	115
				80	85	90
LINEAR SHRINKAGE (max) (30 Minute at 105°C)	MD TD	ASTM D-1204	%	1.5		
				0.6		
MVTR (38° C & 90% RH) (typical)	ASTM F-1249	gm/m <sup>2</sup> /day	SD	HD	VHD	
		(gm/100 in <sup>2</sup> /day)	1.0	0.6	0.4	
OTR (23° C & 0% RH) (typical)	ASTM D-3985	cc/m <sup>2</sup> /day	0.06	0.04	0.03	
		(cc/100 in <sup>2</sup> /day)	1.1	1.0	0.8	
			0.07	0.06	0.05	

★ This dyne value is applicable only for NAFTA, SA, and Poland manufacturing plants.  
# The inherent surface tension of the Untreated side of any PET film is a minimum of 42 dyne/cm.

### STORAGE & HANDLING

FLEXMETPROTECT™ needs to be stored in a warehouse below 35° C (95° F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions, FLEXMETPROTECT™ is suitable for use within 180 days from the date of shipment.

### FOOD CONTACT

FLEXMETPROTECT™ complies with EU and FDA regulations on plastic materials used for food grade application. Specific documents and SDS are available on request.

### DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Flex provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Flex reserves the right to change the technical data sheet at any time without prior notice.