

F-LAM


BALANCED SHRINKAGE FILM

F-LAM is a transparent BOPET film. The film is either both sides Untreated or one side Corona Treated with other side Untreated.

KEY FEATURES:

- Good clarity
- Balanced Shrinkage
- Excellent machinability & handling properties
- Corona treatment improves bonding

FILM STRUCTURE

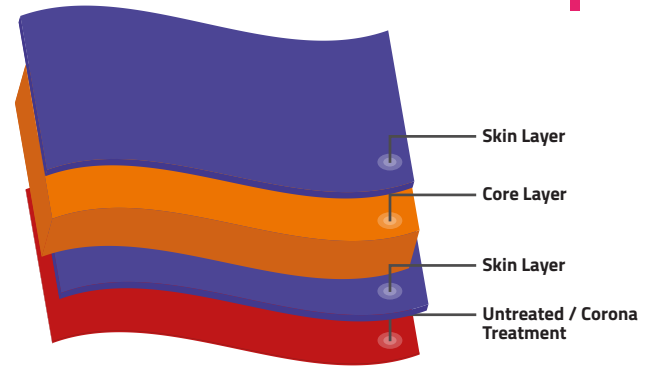

APPLICATION:

- Thermal Lamination
- Document Lamination

PROPERTIES	TEST METHOD	UNIT	TYPICAL VALUES									
			8	10	11	12	15	19	23	36	50	
THICKNESS	Internal	Micron	8	10	11	12	15	19	23	36	50	
		(Gauge)	32	40	44	48	60	76	92	144	200	
YIELD	Internal	m ² / kg	89.28	71.42	64.93	59.52	47.62	37.59	31.05	19.84	14.28	
		in ² / lb	62901	50318	45745	41934	33550	26483	21876	13978	10060	
SURFACE TENSION (min) # (Corona side)	ASTM D-2578	dyne/cm	52									
COF (max) (Untreated to Untreated) (Untreated to Corona Treated)	ASTM D-1894	-	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	0.45	
			0.50	0.50	0.50	0.50	0.45	0.45	0.45	0.45	0.45	
HAZE (max)	ASTM D-1003	%	3.5	3.5	3.5	3.5	4.0	4.0	4.5	4.5	5.0	
TENSILE STRENGTH AT BREAK (min)	MD	ASTM D-882	kg/cm ²	1900	1900	1900	1900	1900	1900	1900	1750	1750
				2000	2000	2000	2000	2000	2000	2000	2000	2000
				27000	27000	27000	27000	27000	27000	27000	25000	25000
ELONGATION AT BREAK	MD	ASTM D-882	%	90	100	100	105	105	110	115	120	125
				80	80	85	85	85	85	90	90	95
LINEAR SHRINKAGE (max) (30 Minute at 150°C)	MD	ASTM D-1204	%	4.0								
				2.0								
MVTR (38°C & 90% RH) (typical)	ASTM F-1249	gm/m ² /day	50	50	45	45	40	35	30	20	16	
		(gm/100 in ² /day)	3.2	3.2	2.9	2.9	2.6	2.3	2.0	1.3	1.0	
OTR (23°C & 0% RH) (typical)	ASTM D-3985	cc/m ² /day	155	155	130	130	110	90	80	70	45	
		(cc/100 in ² /day)	10.1	10.1	8.5	8.5	7.1	5.8	5.2	4.5	2.9	

The inherent surface tension of the untreated side of any PET film is a minimum of 42 dyne/cm.

STORAGE & HANDLING

FLEXPET™ needs to be stored in a warehouse below 35°C (95°F) and should not be exposed to direct sunlight, bright light sources, or high humidity. If the material is stored in the recommended conditions, FLEXPET™ is suitable for use within 270 days from the date of shipment.

FOOD CONTACT

FLEXPET™ complies with EU and FDA regulations on plastic materials used for food grade applications. Specific documents and SDS are available on request.

DISCLAIMER

It is the responsibility of our customer to determine that their use of our products is safe, lawful, and technically suitable in their intended applications. The technical data sheets are provided for discussion purposes only. The customer may not rely on the data provided for any manufacturing purpose. The values provided in the technical data sheet represent typical values based on the best of our knowledge as of the date when the data was compiled. The data is offered solely to provide possible suggestions for your own experimentation and not as a guarantee for the material supplied. The user is solely responsible for the end use of the product and needs to perform their own tests to confirm the product suitability/compatibility in all respects. Flex provides no warranty and accepts no liability for any loss or fitness of the product for any specific purpose based on the information contained in the technical data sheets. Flex reserves the right to change the technical data sheet at any time without prior notice.